


Front Door Paint

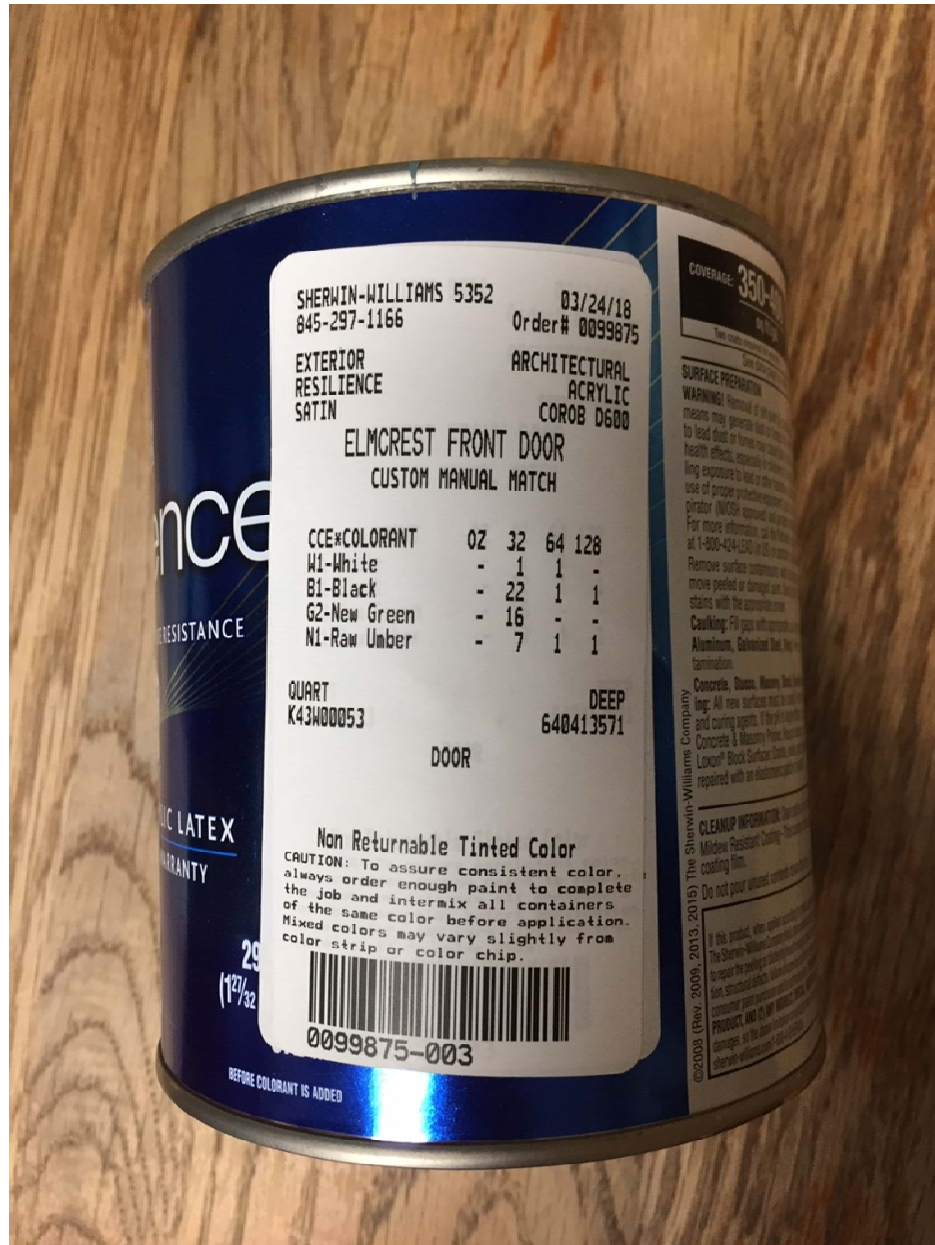

SHERWIN-WILLIAMS 5352 03/24/18
845-297-1166 Order# 0099875

EXTERIOR ARCHITECTURAL
RESILIENCE ACRYLIC
SATIN COROB D600

ELMCREST FRONT DOOR
CUSTOM MANUAL MATCH

CCE*COLORANT	OZ	32	64	128
W1-White	-	1	1	-
B1-Black	-	22	1	1
G2-New Green	-	16	-	-
N1-Raw Umber	-	7	1	1

QUART DEEP
K43W00053 640413571

DOOR

Non Returnable Tinted Color

CAUTION: To assure consistent color, always order enough paint to complete the job and intermix all containers of the same color before application. Mixed colors may vary slightly from color strip or color chip.



0099875-003

BEFORE COLORANT IS ADDED

COVERAGE 350-400
sq ft per gallon

SURFACE PREPARATION
WARNING! Removal of old paint by means may generate dust or fumes that can be inhaled. To avoid health effects, especially for children, avoid breathing in dust or fumes. Use of proper protective equipment is required. For more information, call the manufacturer (MSDS) or visit www.sherwin-williams.com. Remove surface contaminants and move peeling or damaged paint. Stains with the appropriate cleaner. Caution: Fill gaps with appropriate material. Aluminum, Galvanized Steel, Hot Dip Galvanized Steel, and Masonry.

Concrete, Stone, Masonry, Brick, and Block: All new surfaces must be clean, dry, and curing agents. If the previous surface is old, use Sherwin-Williams Concrete & Masonry Primer. Masonry: Loxon® Block Surface Coats, and repair with an elastomeric repair.

CLEANUP INFORMATION: Wash brushes and rollers with water. Wash rollers with water. Wash brushes with water. Wash rollers with water. Wash brushes with water. Wash rollers with water.

©2008 (Rev. 2009, 2013, 2015) The Sherwin-Williams Company

Garage Door & Trim

